


The background is a deep black space filled with vibrant blue, ethereal, wavy lines that sweep across the frame. Scattered throughout are numerous small, bright blue dots and a few larger, multi-pointed white star-like shapes, creating a cosmic or digital atmosphere.

LEED


SCREEN USA

HIGHT BRIGHT LED T8
FLOURESCENTES




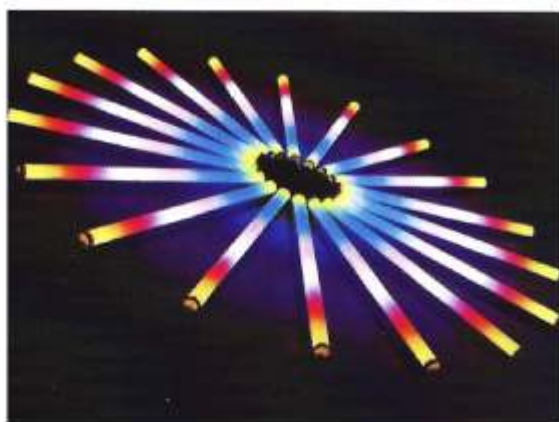


RD-8001


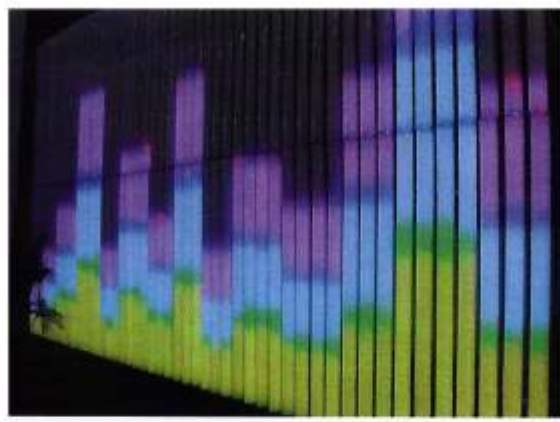


RD-8001

A photograph of a modern office interior. The space features glass partitions, yellow chairs, and large windows. The office is well-lit with natural light from the windows and artificial light from the ceiling. The furniture is contemporary, and the overall atmosphere is professional and bright.

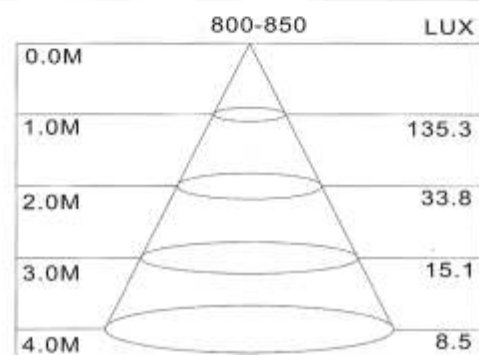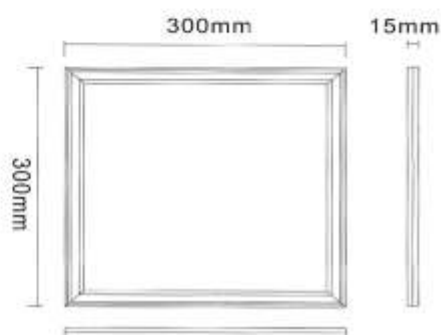

Model	Optical Specification				Electrical		
	Color Tem(K)	Flow rate	Angle	Lumen	SIZE	Volt	Power
RD-300	2700-3200K	70-80lm/W	120°	750lm	300x300x15mm	AC100-240V	10W
	6000-7000K						
RD-600	2700-3200K	70-80lm/W	120°	3000lm	600x600x15mm	AC100-240V	40W
	6000-7000K						

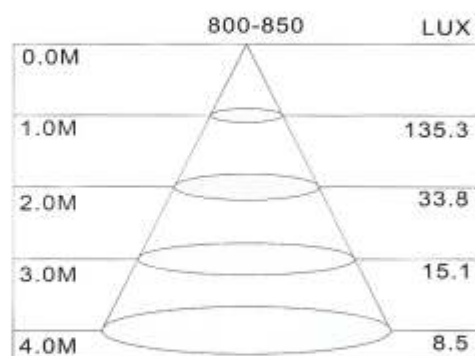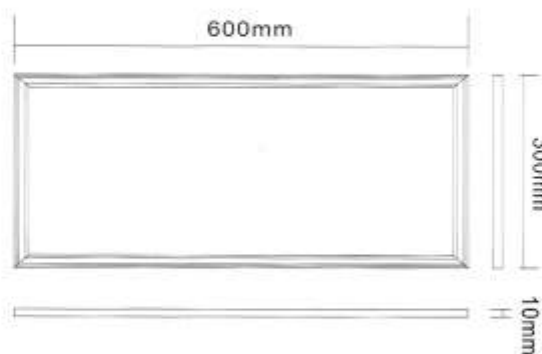

Model	Optical Specification				Electrical		
	Color Tem(K)	Flow rate	Angle	Lumen	SIZE	Volt	Power
RD-306	2700-3200K	70-80lm/W	120°	1500lm	300x600x10mm	AC100-240V	20W
	6000-7000K						
RD-3012	2700-3200K	70-80lm/W	120°	3000lm	300x1200x10mm	AC100-240V	40W
	6000-7000K						

LED HIGHT POWER SHOOT THE LIGHT SERIES



RD-9009

Shell Material
Power:3x1W
Input voltage:110-260V
Product size: ϕ 95mm
Vision Effects: ●●●○○●



RD-9010

Shell Material
Power:3x1W
Input voltage:110-260V
Product size: ϕ 85mm H95mm
Vision Effects: ●●●○○●



RD-9011

Shell Material
Power:3x1W
Input voltage:110-260V
Product size: ϕ 85mm H95mm
Vision Effects: ●●●○○●



RD-9012

Shell Material
Power:3x1W
Input voltage:110-260V
Product size: ϕ 75mm H100mm
Vision Effects: ●●●○○●



RD-9013

Shell Material
Power:3x1W
Input voltage:110-260V
Product size: ϕ 70mm
Vision Effects: ●●●○○●



RD-9014

Shell Material
Power:3x1W
Input voltage:110-260V
Product size: ϕ 85mm H130mm
Vision Effects: ●●●○○●



RD-9015

Shell Material
Power:3x1W
Input voltage:110-260V
Product size: ϕ 65mm H110mm
Vision Effects: ●●●○○●



RD-9001

Shell Material
Powe:1x1W
Input voltage:110-260V
Product size: ϕ 35mm H65mm
Vision Effects: ●●○○○●



RD-9002

Shell Material
Powe:1x1W
Input voltage:110-260V
Product size: ϕ 33mm
Vision Effects: ●●○○○●



RD-9003

Shell Material
Powe:1x1W
Input voltage:110-260V
Product size: ϕ 30mm
Vision Effects: ●●○○○●



RD-9001

Shell Material
Powe:1x1W
Input voltage:110-260V
Product size: ϕ 32mm
Vision Effects: ●●○○○●



RD-9005

Shell Material
Powe:1x1W
Input voltage:110-260V
Product size: ϕ 30mm
Vision Effects: ●●○○○●



RD-9006

Shell Material
Power:1x1W
Input voltage:110-260V
Product size: ϕ 65mm
Vision Effects: ●●○○○●



RD-9007

Shell Material
Powe:3x1W
Input voltage:110-260V
Product size: ϕ 160mm
Vision Effects: ●●○○○●



RD-9008

Shell Material
Aluminum+ stainless steel
Input voltage:110-260V
Product size: ϕ 53mm H85mm
Vision Effects: ●●○○○●



RD-DMX RGB-A



RD-DMX RGB



RD-DMX 192



WATERPROOF AMPLIFIER



DIMMER -RD-102



RGB DIMMER



RD-1809-LS8R



RD-1809



POWERSUPPLY



LED DOWN LIGHT

Features

- The new LED downlight is designed to be easily installed into most standard recessed housing for retrofits and new construction.
- Create specially for residential market, the LED downlight is designed to be different color ring replaceable, making applicable to special atmosphere space desired
- Lifetime 35000 Hrs

Applications

- Operating temperature:-25°C to +45°C



RD-5014-9w

Size: ϕ 130x66mm
Power: 9x1W
Color: W, WW, CW
Lumen: 810LM
Voltage: AC100-240V



RD-5015-12w

Size: ϕ 165xH66mm
Power: 12x1W
Color: W, WW, CW
Lumen: 1080LM
Voltage: AC100-240V



RD-5016-12W

Size: ϕ 165x66mm
Power: 12x1W
Color: W, WW, CW
Lumen: 1080LM
Voltage: AC100-240V



RD-5017-18w

Size: ϕ 200x66mm
Power: 18x1W
Color: W, WW, CW
Lumen: 162LM
Voltage: AC100-240V



RD-5019-24W

Size: ϕ 230xH110mm
Power: 24W
Color: W, WW, CW
Lumen: 2160LM
Voltage: AC100-240V



RD-5011-7w

Size: ϕ 110xH67mm
Power: 7x1W
Color: W, WW, CW
Lumen: 630LM
Voltage: AC100-240V



RD-5012-12W

Size: ϕ 140xH63mm
Power: 12x1W
Color: W, WW, CW
Lumen: 1080LM
Voltage: AC100-240V




RD-5013-18w

Size: ϕ 170xH150mm
Power: 18x1W
Color: W, WW, CW
Lumen: 1620LM
Voltage: AC100-240V




RD-t hd-1703

Working voltage: 220V
Rated Power: 3W
Material: Aluminum+Glass
Dimension: $\phi 92 \times 53 \text{mm}$
Cut-out: $\phi 75 \text{mm}$

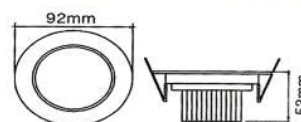


RD-t hd-1709

Working voltage: 220V
Rated Power: 9W
Material: Aluminum+Glass
Dimension: $\phi 130 \times 74 \text{mm}$
Cut-out: $\phi 115 \text{mm}$



RD-t hd-1720

Working voltage: 220V
Rated Power: 20W
Material: Aluminum+Glass
Dimension: $\phi 190 \times 80 \text{mm}$
Cut-out: $\phi 175 \text{mm}$








RD-8001

Size: ϕ 455xH330mm/ ϕ 455xH350mm
 Power: 30W/50W
 Working temperature: -50°C --+40°C
 Vision Effects: ■ ■





RD-8002

Size: ϕ 555xH400mm/ ϕ 555xH430mm
 Power: 80W/100W
 Working temperature: -50°C --+40°C
 Vision Effects: ■ ■

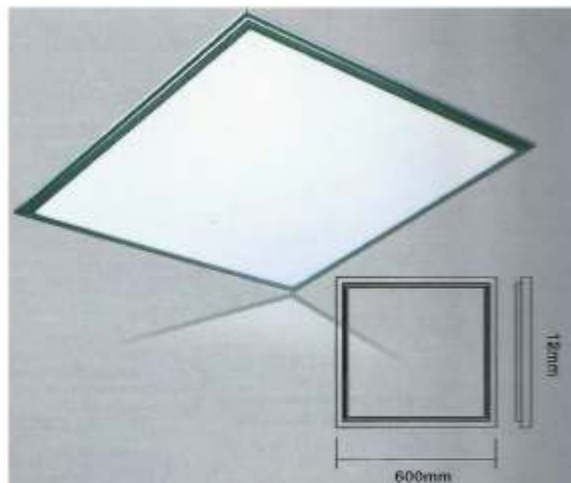

Model : RD-MB0001
Input voltage: AC85-160V AC170-265V
Power: 30W
Led Qty : 400 pcs
Color Temperature : 3000k --8000k
Flux : 2300lm
Material: Aluminum + Pmma
Color: W/WW/CW/R/Y/B/G
Item size : LxWxH=300x300x12mm

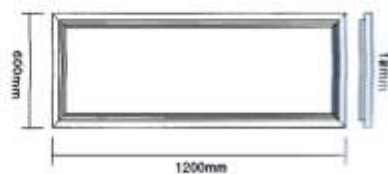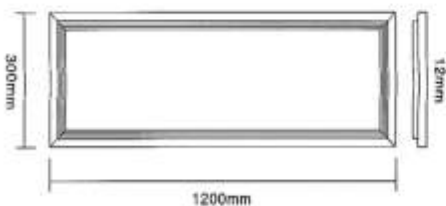

Model : RD-MB0002
Input voltage: AC85-160V AC170-265V
Power: 30W
Led Qty : 400 pcs
Color Temperature : 3000k --8000k
Flux : 2300lm
Material: Aluminum + Pmma
Color: W/WW/CW/R/Y/B/G
Item size : LxWxH=300x1200x12mm

Model : RD-MB0003
Input voltage: AC85-160V AC170-265V
Power: 45W
Led Qty : 600 pcs
Color Temperature : 3000k --8000k
Flux : 2300lm
Material: Aluminum + Pmma
Color: W/WW/CW/R/Y/B/G
Item size : LxWxH=600x300x12mm

TUBE LED T8



FEATURES:

- * 10times longer life than standard T8 fluorescent lighting
- * Instant start with ms
- * Emit soft light, No glare
- * Solid state technology basis, high shock resistant
- * No mercury or toxic substances to dispose
- * No standard or electronic ballast to buy in your light source or fitting
- * Installation is simple and easy, minimum maintenance costs
- * No ultra violet light output to degrade other materials or paintings
- * Operat temperature from -40~60°C

Item: RD-T8-Series

Voltage: AC85-265V

Length: 60 cm / 120 /150

Watt: 8 W / 15 W / 20W


Color: warm and cool white

Light Angle: 90 - 120 degree

Startimes RD LED fluorescent tube is designed to replace conventional bi-pin T8 fluorescent tubes. It can be fitted on standard.

fluorescent tube fitting without any additions or changes to the ballast. Compared to 5-7 year lifespan of the conventional tube, this product has a 10 year lifespan and will bring an energy reduction of about 20% from standard installations.

The LED Fluorescent is Suitable for all places where it is request long time use with low occupancy rates. Such as stairwell, corridors, warehouses, galleries and museum etc.

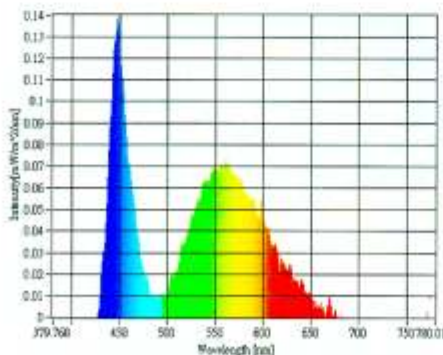



618W ARBOR VITAE ST.
SUITE A INGLEWOOD
CALIFORNIA 90301 USA

001 52 55 43 22 85 86

www.ledscreenusa.com

rey@ledscreenusa.com